


Cat.6 UTP 8P8C Plug, Two Rolls Three Branches, One Part Type

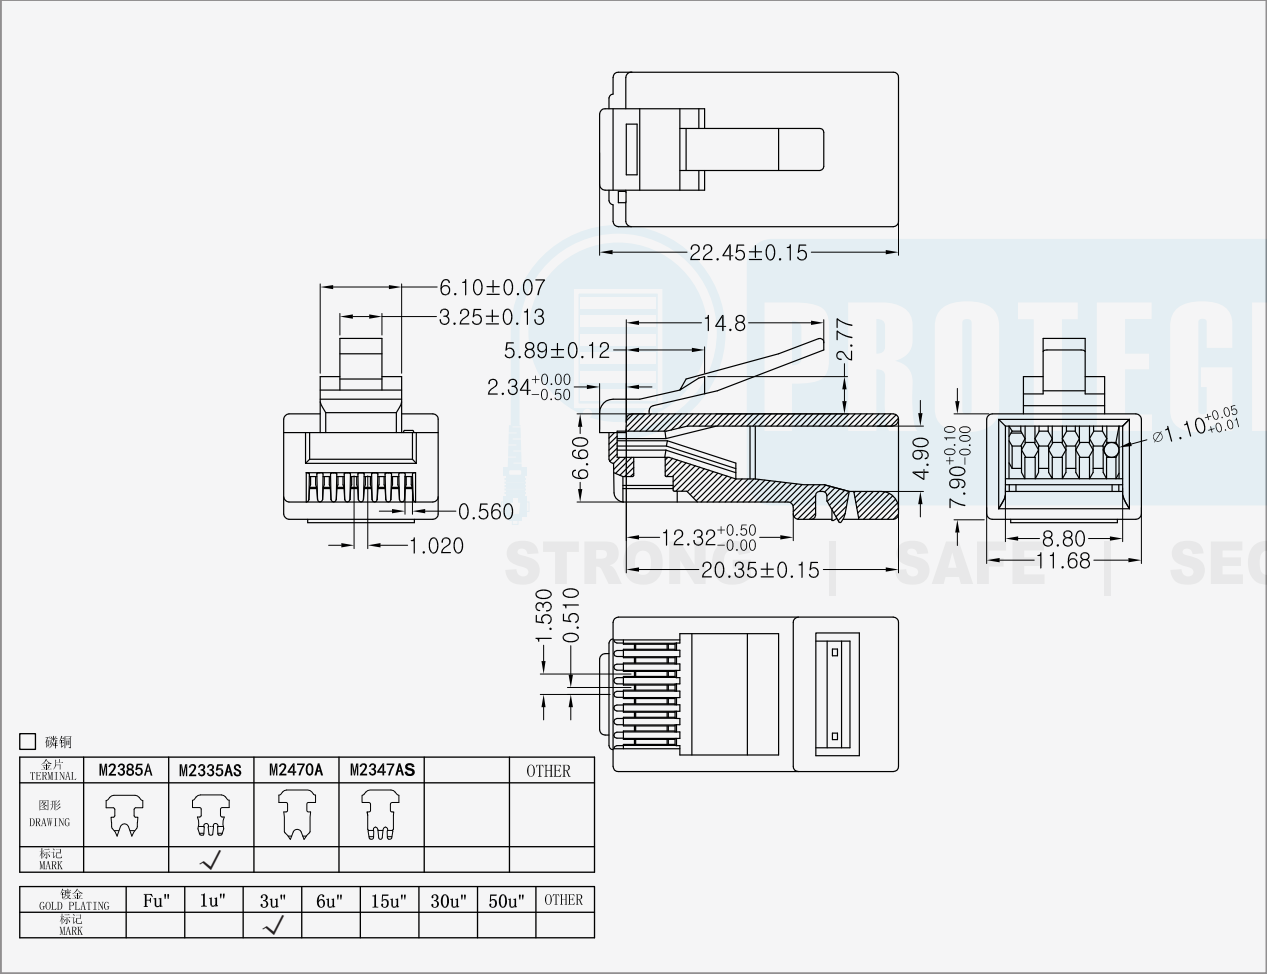

Inspection for Environmental Protection:
Based on the performed tests on submitted sample,
the test results are Compliant with the limits of RoHS and REACH

Electrical Test:
A. 250V AC max, at 2A.
B. Dielectric withstanding 1000V DC/min, <0.5A.
C. Insulation Resistance: >500 MΩ, 1000V DC/min.
D. Contact Resistance: <20 MΩ.

Mechanical:
A. Cable-to-plug tensile strength-20LBS (89N)min.
B. Durability: 2000 mating cycles.

Operating Temperature: -40°C~+125°C.