Category 6A UTP 24 Port Patch Panel

Part No: PG-C6A24P0750U

471.60

4.00

447.00

15.20

482.60

32.00

44.20

Cat. 6

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24

122.00?.20
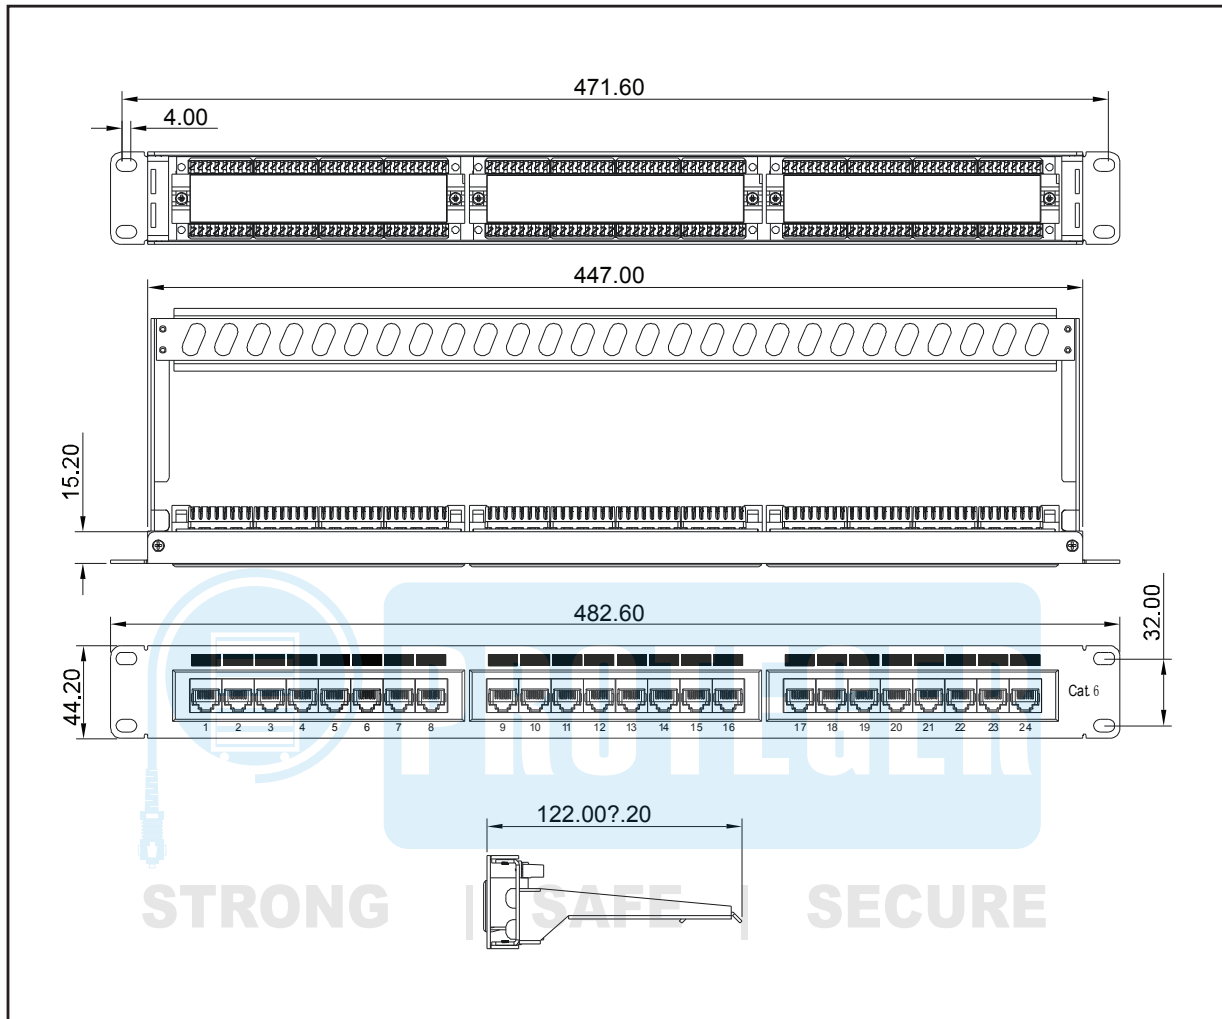
Main Description of The Product:

1. 24 ports patch panel, Cat.6A UTP type. The structure of each port of this patch panel is same and unaided. That structure makes sure that the performance of each port is consistent.

2. The cable manager is combined in this patch panel. All kinds of cables with different dimensions can be fixed on the patch panel.

3. According with ISO/IEC 11801:2002 CLASS EA and ANSI/TIA/EIA/568B.2-10 Cat.6A Standard. T568A punching sequence and T568B punching sequence are both compatible. Fit for Horizontal Distribution in the Equipments Room and equipments connecting.

4. Connecting: FCC port for Cat.6A UTP patch cord and IDC for horizontal distribution cables.

5. Compatibility: Compatible for UTP Cat.6 or Cat.5e Cat.5 general cable distribution systems.

Technology Characteristics:

1. Entire high-carbon steel outer frame, with plastic powder cladding .

2. RJ45 jack Frame Material: PBT; golden clad phosphor bronze pins; Shielding shell of the Rj45 jack: Brass housing with nickel-plate; IDC clip: Tinned phosphor bronze pins.

3. Fit for 22AWG, 23AWG and 24AWG cables,Punching Dependability: 250 times. FCC ports insertion dependability: 750 times.

4. Cabling Sequence: T568A&B

5. Punching tools: Standard 110 or LSA type punching tools

6. Testing condition of transmitting capability : 500MHz